

RUBBER TRACKS

Bobcat Parts offer a wide variety of track sizes and patterns to satisfy your needs for any type of application



RUBBER TRACKS

Maximize your Bobcat equipment productivity with high performing and durable Genuine rubber tracks, engineered, tried and tested specifically for your Excavator or Track Loader to not only withstand the most challenging environments, but also to deliver a softer ride and the traction needed to bring out the machine's full capabilities.

To make track selection easier, we have simplified the Bobcat range and offer two main options – Premium and Standard – to suit your needs and preferences.

For maximum convenience, selected excavator tracks offer an extended warranty period of up to 24 months (or 2000 hours) or even 36 months (or 3000 hours).

24 months / 2000 hours or
36 months / 3000 hours
WARRANTY



  WATCH TRACKS VIDEO



BOBCAT PREMIUM RUBBER TRACKS

At Bobcat, we always recommend using genuine Premium Bobcat rubber tracks, the same product as used in our mass production, engineered and verified to provide the best performance and longest service life.

Thanks to our internal testing and partnering with industry-leading suppliers, we make sure these are the best tracks available on the market for each Bobcat machine.

- Developed and tested specifically for Bobcat equipment.
- Superior quality rubber tracks used in mass production.
- Longest service life – ideal for high-hours construction work.
- Minimal vibration for operator comfort thanks to vibration-mitigating technology.
- Premium excavator tracks come with an extended warranty period of up to 24 months or 2000 hours, or even 36 months or 3000 hours.


BOBCAT STANDARD RUBBER TRACKS

We realize that the no-compromise approach to quality that we apply to Premium tracks comes at a price, which cannot always be justified in the eyes of the customer.

That's why we also offer a range of Bobcat Standard rubber tracks. These tracks are intended for less demanding applications, fewer hours of operation, or other situations in which the customer requires an economical solution with Bobcat quality.

- The ideal solution for older machines, fewer operating hours or less demanding applications.
- Economical alternative to Premium tracks.
- Slightly adapted Bobcat approved tracks, developed to correspond with market value.
- Standard Loader tracks use the same favored “C” pattern as Premium.
- Standard tracks have an expected service life of 80% of the Premium tracks' service life, based on usage in moderate working conditions.

TRACK DIMENSIONS

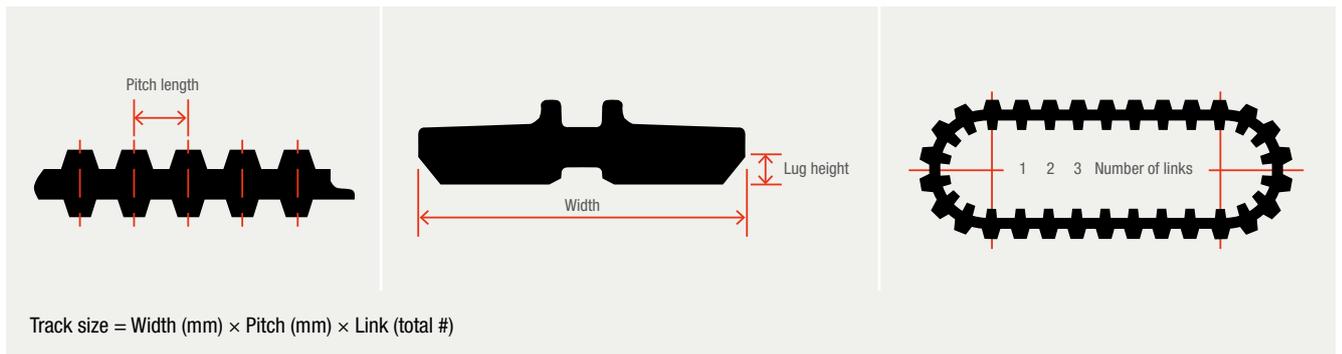

BOBCAT COMPACT EXCAVATOR TRACKS










While compact excavator tracks are commonly used at lower speeds, and for less aggressive applications, than those for a compact tracked loader, they can also be subjected to the same demanding working conditions, which put a lot of stress on the tracks.

Bobcat rubber tracks are designed to meet the operational and performance requirements of Bobcat excavators. Not only do they withstand tough operating conditions, they also provide a smooth ride and optimized operating costs, without sacrificing performance. Excavator rubber tracks come in 2 options for the majority of machines – Premium and Standard – each using the pattern selected with Bobcat's and our manufacturers' expertise.

RUBBER TRACKS FOR COMPACT EXCAVATORS

MODEL	TRACK SIZE (WIDTH × PITCH LENGTH × NO. OF LINKS)	PREMIUM		STANDARD	
		PART NUMBER	TREAD PATTERN	PART NUMBER	TREAD PATTERN
418, E08, E10, E10E, E10Z	180 × 72 × 39	7255246	E	7373949	F
319, E14	180 × 72 × 41			7373950	F
	200 × 72 × 41	7365328	K		
220, 320, 322	230 × 72 × 43			6987733	G
321, 323, E16, E17, E17Z, E19	230 × 48 × 66	7259426	D	7373952	H
E20, E20Z	230 × 48 × 72	7259427	D	7373953	H
E25	250 × 52.5 × 76	7298190	A	7419905	J
E26	250 × 52.5 × 80	7320132	A		
225	320 × 100 × 40	6663953	B		
225, 325, 328	300 × 52.5 × 74			7445648	I
	320 × 52.5 × 74	6672773	A		
329, 331, 334, 428, 425, E26, E27, E27Z, E32, E34	300 × 52.5 × 80	7243364	A	7373954	I
E35	300 × 52.5 × 84	7275801	A	7373955	I
335, 430, E42	320 × 55 × 88			7373956	E
337, 341, 435, E45, E50, E55 Single-flange rollers	400 × 73 × 74	7303382	C	7373957	K
E55Z, E60 Dual-flange rollers	400 × 73 × 74	7314068	A		
E60, E62	400 × 72.5 × 76	7365330	C	7373958	K
442	450 × 71 × 86			7373959	A
E80, E85	450 × 81 × 76	7365331	C	7373960	K
E88	450 × 74 × 83.5	7356768	A		





BOBCAT COMPACT TRACK LOADER TRACKS



Maximize your Bobcat Compact Track Loader performance with highly durable and Genuine Bobcat rubber tracks, designed to meet the most demanding expectations and provide a smooth ride and the highest durability. Don't sacrifice ride comfort for added traction or longevity.

Bobcat tracks have been tried and tested to not only withstand the most challenging environments, but to also deliver a softer ride by distributing the machine's weight over a larger surface area. Our tracks offer the traction needed to bring out the loader's full capabilities.

RUBBER TRACKS FOR COMPACT TRACK LOADERS									
MODEL	TRACK SIZE (WIDTH × PITCH LENGTH × NO. OF LINKS)	PREMIUM C PATTERN		STANDARD C PATTERN		MULTI-BAR LUG		MULTI-BAR LUG NON-MARKING	
		PART NUMBER	TREAD PATTERN	PART NUMBER	TREAD PATTERN	PART NUMBER	TREAD PATTERN	PART NUMBER	TREAD PATTERN
MT55	180 × 72 × 39	7009964	C	7373949	A	6988846	B	6989141	B non-marking
	250 × 72 × 39	7009965	C						
MT100	180 × 45 × 72	7271923	C	7307109	D	7311898	B	7303700	B non-marking
	250 × 45 × 72	7271924	C	7307110	D	7311899	B	7303701	B non-marking
T110	250 × 72 × 52	6688373	C	7419906	C				
T140, T450	300 × 84 × 46	6682177	C	7419907	C	7024982	B		
	320 × 84 × 46					6987675	B		
T180, T190, T590	320 × 86 × 49	6680161	C	7316758	C				
	320 × 84 × 50							6989140	B non-marking
	400 × 84 × 50							7305148	B non-marking
	400 × 86 × 49	6685650	C	7316759	C	7030194	B		
T650	320 × 86 × 52	6680149	C	7316760	C				
	320 × 84 × 53					7261331	B		
	450 × 86 × 52	6680150	C	7316761	C	7320104	B		
	450 × 84 × 53							6989159	B non-marking
T66	400 × 86 × 50	7324236	C	7408148	C	7408151	B	7417305	B non-marking
T76	450 × 86 × 53	7301305	C	7396438	C	7359650	B	7396441	B non-marking
T250, T300, T320, T770	320 × 86 × 55	6678748	C	7316762	C				
	450 × 84 × 56							6989157	B non-marking
	450 × 86 × 55	6678749	C	7316763	C	7320105	B		
T86 T870 Roller Suspension	450 × 86 × 58	7277043	C	7316764	C	7419283	B		
	450 × 84 × 60							6989158	B non-marking
	450 × 84 × 60					6989042	B		
T870 Torsion Suspension B47C, B47L, B47H	450 × 60 × 86	7266334	C	7316765	C				



LOADER TRACK TREAD PATTERNS

For loaders, we stick to the proven 'C' pattern across the range of machines, offered in both Premium and Standard versions. If increased traction in wet or loose conditions is needed, we offer the 'MBL' track pattern.

The choice between Narrow or Wide 'C' tracks gives you the option to adapt the machine's characteristics according to terrain or application. For increased ground pressure, added traction and more pushing force, choose a narrow track. Wide tracks are a good choice when lower ground pressure and flotation are desired.




PREMIUM C-PATTERN

The best durability and performance the market has to offer for all-season use. One of the most versatile, no-compromise tracks used in mass production. Provides superior traction in most applications.

Recommended uses:

- Great for all high-hours construction work and heavy-duty applications.
- Excellent on dirt, mud and rock, and for demolition.
- Not recommended for snow.




STANDARD C-PATTERN

The track offers durability and traction for all-season use in a more economical package. It is the same pattern as used in production and one of the most versatile on the market, performing well in all different types of applications.

Recommended uses:

- Great for all general construction work.
- Excellent in dirt and mud.
- Not recommended for snow or extremely rocky conditions.




MULTI-BAR LUG PATTERN

Durable all-season track that provides superior traction in wet conditions and extended wear life on hard flat surfaces.

Recommended uses:

- Great for all general construction work.
- Excellent on sand, dirt or snow.
- Not recommended for extremely rocky conditions.



MULTI-BAR LUG NON-MARKING PATTERN

Special orange-colored version of Multi-Bar Lug Bobcat tracks for all the jobs when it is important not to leave black rubber marks on the surface.

Recommended uses:

- In workspaces where you must keep the floors clean.
- Superior traction in wet conditions and extended wear life on hard surfaces.
- Not recommended for extremely rocky conditions.



CHOOSING THE RIGHT TRACKS FOR COMPACT TRACK LOADERS


At Bobcat, we always recommend using Bobcat rubber tracks instead of uncertified, unapproved tracks

The manufacturing technology is a sophisticated combination of special kinds of rubber, vulcanized along with steel embeds and loops of steel cord. The right shape, pattern, depth and well-specified rubber materials guarantee long life, low ground pressure and high traction. Thanks to our expertise in testing, we always collaborate with our Bobcat suppliers to optimize the components for our machines – and the rubber tracks are no exception.



USE GENUINE BOBCAT RUBBER TRACKS TO GET THE MOST OUT OF YOUR INVESTMENT

With genuine Bobcat rubber tracks, you will benefit from lower operating costs and higher productivity. Furthermore, they offer greater comfort and longer tread wear than uncertified, unapproved aftermarket tracks. Follow the recommendations below to choose the best track for your application and expected operating hours.

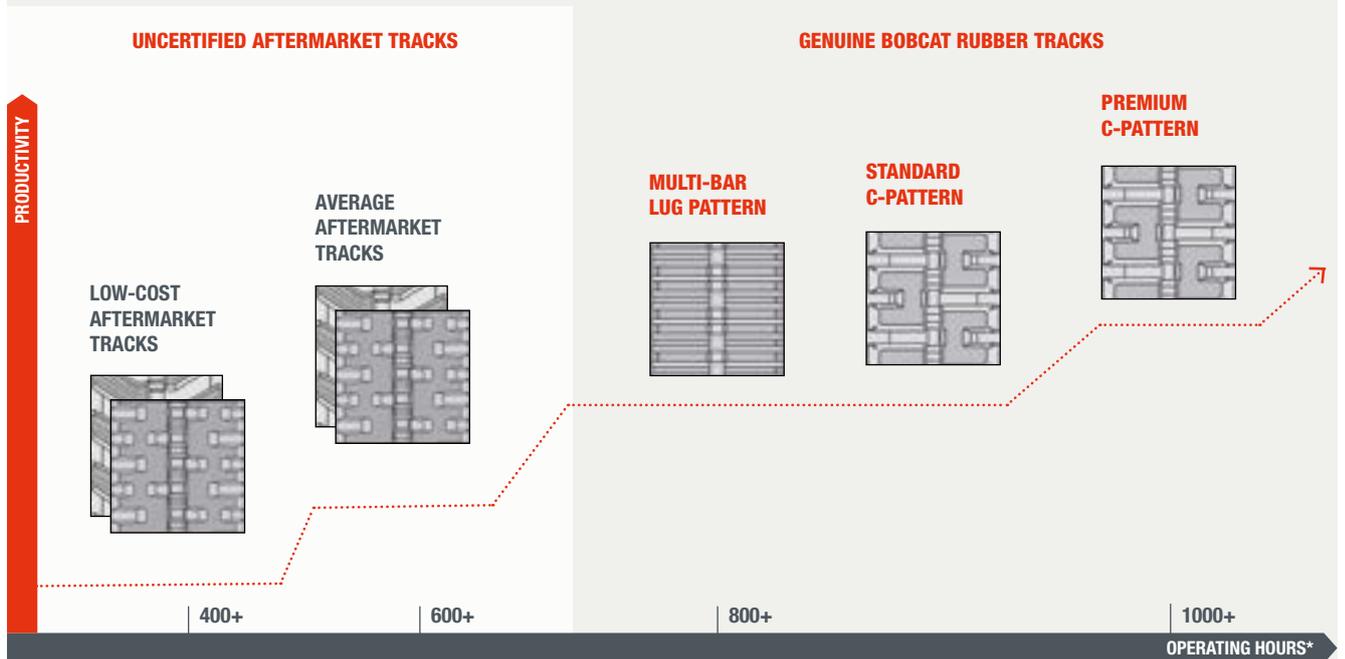

* The hour ratings listed above are based on usage in moderate working conditions

	ROCK	DIRT	SAND	CONCRETE	DEMOLITION	TURF	SNOW	MUD	SLOPED	CLAY
PREMIUM C-PATTERN	●	●	●	●	●	●	○	●	●	●
STANDARD C-PATTERN	●	●	●	●	●	●	○	●	●	●
MULTI-BAR LUG PATTERN	●	●	●	●	○	●	●	●	○	●

BEST ● BETTER ● GOOD ○

RUBBER TRACK DAMAGE PREVENTION AND MAINTENANCE

Even though Bobcat machines operate in the harshest conditions, it is important to avoid improper applications or usage in combination with poor maintenance and incorrect track tension.

To achieve optimal track tension, we test and validate the correct interaction with undercarriage components. Our specialized engineering and testing teams conduct rigorous and demanding validation processes, both in the laboratory and in the field.

For performance and durability field tests – in real-life conditions with mud, sand and rocks – we use our testing polygon, focusing on common failure modes and simulating extreme operation of the machine, such as working in rocky conditions, driving over a curb, steep slope retention, and simulating detracking.

EXCAVATOR USAGE LIKELY TO CAUSE TRACK DAMAGE WHEN THE RECOMMENDED TENSION AND SYSTEM CONDITIONS AREN'T MAINTAINED.



SHARP OBJECTS
Risk of damage to lugs and main cable.




UNEVEN SURFACES
Risk of detracking with lug/core damage.



SLIPPAGE
Appropriate load & speed to avoid rapid tread wear.



IMPACT WITH BUCKET
Risk of lug, core and/or main cable damage.




ON-THE-SPOT TURNING
Risk of detracking with possibility of lug and core damage.



OPERATION ON A SLOPE
Risk of detracking or excessive damage to lugs.



TRACK EDGE IN CURBLINE
Extreme side wear and possible damage to iron core.

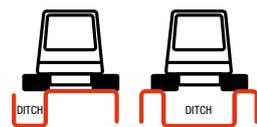

MACHINE ASTRIDE A TRENCH
Possible lug and/or iron core damage.

- Maintaining recommended track tension as described in the machine's operation manual helps maximize track life. Regular cleaning and maintenance of the entire track system is essential to ensure a long lifespan.

- Warranty covers defects in material and workmanship but not damage from use or installation because of misapplication, misuse, negligence, alteration, accident, field and road hazards, overload, mismatching of opposite side tracks, use of non-genuine undercarriage components, or poor mechanical condition, maintenance or adjustment.

BOBCAT PREMIUM EXCAVATOR TRACKS WARRANTY CONDITIONS



Selected Bobcat premium excavator rubber tracks are covered by warranty for up to 36 months (or 3000 hours) for the utmost convenience and peace of mind. The warranty covers disabling defects in materials and workmanship that appear under proper usage conditions.

ELIGIBILITY

- Original owner of new Bobcat Premium Excavator Rubber Track purchased through an authorized Bobcat Aftermarket Parts dealer.
- Factory-fitted Bobcat Rubber Tracks are excluded from this extended warranty program, which is an aftermarket-only program.

COVERAGE

- Bobcat Premium Excavator Rubber Tracks are covered by warranty, from the date of installation on the machine, against defects in materials and workmanship.
- Bobcat Premium Excavator Rubber Tracks that become unserviceable as a result of a defect in materials or workmanship, as determined by Bobcat, will be replaced, or an allowance will be given toward the purchase of a replacement Bobcat track, at Bobcat's choice.



EXCLUDED FROM COVERAGE

- Track no longer owned by the original purchasing end user.
- Claims outside the months of service or hour limits listed.
- Track manufactured more than 60 months prior to warranty claim.
- Damage from use or installation as a result of misapplication or exceeding the specifications of the track's original design capabilities.
- Failure resulting from abuse, misuse, negligence, alteration, accident, field and road hazards, or stubble damage, overload, mismatching of opposite side tracks, misapplication, or use of non-OEM undercarriage components, or poor mechanical condition, maintenance or adjustment.
- Cosmetic defects, such as surface cracks, splits and other superficial distress that may impact track appearance but do not render the track unusable or measurably diminish overall life.
- Usage, installation, repair or adjustment judged by Bobcat to be improper.



24 months / 2000 hours or
36 months / 3000 hours
WARRANTY

OWNER OBLIGATIONS AND SUPPORTING DOCUMENTATION FOR WARRANTY CLAIMS

- Notification of failure within applicable warranty period.
- Provision of valid proof of purchase.
- Provision of supporting photo documentation:
 - Photos of entire machine including model and series
 - Several clear, close-up photos to identify suspected defective areas
 - At least one clear view of entire track, including view of suspected defective area
 - Photos of logo, part number, serial number and country of manufacture
- Submission of claim within 60 days of the failure.
- Transportation cost to warranty service location. Freight charges if applicable.
- Installation costs and taxes.
- Undercarriage components properly maintained and adjusted.

BOBCAT PREMIUM TRACKS WARRANTY LIMITS

WARRANTY CONDITIONS			
MODEL	PART NUMBER	MONTHS OF SERVICE	HOURLY LIMIT
E08, E10	7255246	24	2000
E14	7365328	24	2000
E17, E17Z, E19	7259426	24	2000
E20	7259427	24	2000
E25	7298190	24	2000
E25 (K2)	7320132	24	2000
E26, E32	7243364	24	2000
E35	7275801	24	2000
E45, E50, E55	7303382	24	2000
E60, E62	7365330	36	3000
E80	7365331	36	3000

Hours / Months – whichever comes first. If months of service are not known, manufacturing date will be used.



LEARN MORE ABOUT TRACKS IN ONLINE TRAINING



DOWNLOAD RUBBER TRACKS REFERENCE GUIDE



OVER-THE-TIRE TRACKS

Skid-steer loaders can sometimes struggle in very wet or soft terrain. Bobcat over-the-tire tracks increase traction and flotation in difficult and slippery conditions to maximize grip and keep you moving. They expand the capabilities of your skid loader without you having to invest in new equipment, effectively giving you a single machine that can do the work of both a skid steer and a track loader.

Over-the-tire tracks (OTTs) are available to fit most skid-steer loaders. Choose the aggressive diamond pattern steel track for maximum grip, or the steel track with rubber pads for less surface damage. Both diamond and rubber OTTs are suitable for use with pneumatic and solid cushioned tires.

▶ Diamond Over-the-Tire Tracks



These tracks are designed for serious traction and rough conditions. The diamond pattern creates more traction than normal smooth bar tracks, maximizing your machine's power. The track design allows excellent clean-out for snowy and icy conditions or mud and clay.

These tracks help distribute the weight of your machine over a wider area and significantly reduce bouncing.

APPLICATION

Mud, clay, wet grass, slopes, loose rock, sand, snow and ice.

MAIN BENEFIT

Maximum traction.

▶ Rubber Over-the-Tire Tracks



Rubber over-the-tire tracks are extremely versatile and allow you to maximize your traction without damaging surfaces like pavement, asphalt or grass. They also provide excellent flotation and traction in muddy or slippery conditions.

The high-wear rubber pads are replaceable and feature a layer of steel inside to keep your tires safe from punctures.

APPLICATION

Universal for both on-road and off-road.

MAIN BENEFIT

Versatility and surface protection.


OVER-THE-TIRE TRACKS								
PART NUMBER	TRACK TYPE	TYPE	TIRE WIDTH (IN)	TIRE WIDTH (MM)	LENGTH* (IN)	LENGTH* (MM)	PICTURE	
7281276	2 Diamond Tracks (22 sections/side)	Diamond OTT	10	254	186	4730	A	
7281277	2 Diamond Tracks (24 sections/side)	Diamond OTT	12	305	203	5160	A	
7281278	2 Diamond Tracks (26 sections/side)	Rubber OTT	14	356	220	5590	A	
7281279	2 Rubber Tracks (25 sections/side)	Rubber OTT	10	254	182	4625	B	
7281280	2 Rubber Tracks (28 sections/side)	Rubber OTT	12	305	204	5180	B	
7281281	10" Diamond Track Section	Diamond link	10	254	8.5	216	C	
7281282	12" Diamond Track Section	Diamond link	12	305	8.5	216	C	
7281283	14" Diamond Track Section	Diamond link	14	356	8.5	216	C	
7281284	10" Rubber Track Section	Rubber link	10	254	7.3	185	D	
7281285	12" Rubber Track Section	Rubber link	12	305	7.3	185	D	

*Each link can be reduced by 3/4" to ensure correct fit.



► Wheel Spacers

Over-the-tire tracks need a minimum of 75 mm (3 inches) of clearance between the tire sidewalls and the machine to ensure proper operation during tight turns. Wheel spacers are available to increase clearance if needed. Some wheels have reversible offset rims that can be turned around for increased clearance, eliminating the need for spacers.

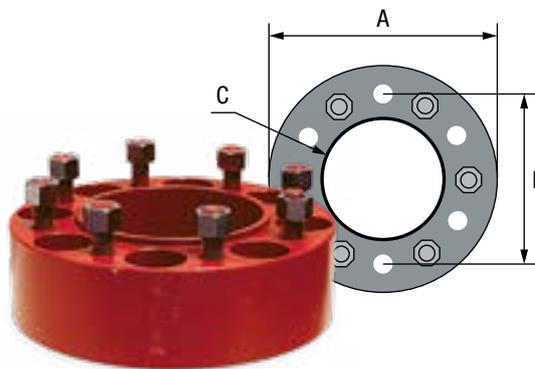

WHEEL SPACERS												
PART NUMBER	SPACER COLOR	QUANTITY	SPACER WIDTH		STUD SIZE	NUMBER OF STUDS	(A) OUTSIDE DIAMETER		(B) STUD DISTANCE ACROSS (ON CENTER)		(C) PILOT HOLE DIAMETER	
			(in)	(mm)			(in)	(mm)	(in)	(mm)	(in)	(mm)
7281288	Red	4	2	51	9/16"	8	10	254	8	203	6	153
7281289	Black	4	1.5	38	9/16"	6	8	203	6	152	4.6	117
7281290	Gray	4	2	51	5/8"	8	10	254	8	203	6	153
7281291	Black	4	2	51	9/16"	8	12.8	325	10.8	274	9	229
7281292	Green	4	3	76	5/8"	8	10	254	8	203	6	153

► Replacement Parts

Damaging a section or part of your over-the-tire tracks doesn't mean you need to purchase a whole new set. Repair your tracks by easily replacing worn-out sections, pins and links. You can replace any worn-out part in minutes.

REPLACEMENT PARTS	
PART NUMBER	DESCRIPTION
7281286	10" Replacement Rubber Pads with Nuts (50 pcs)
7303900	10" Replacement Rubber Pads with Nuts kit (4 pcs)
7281287	12" Replacement Rubber Pads with Nuts (56 pcs)
7303901	12" Replacement Rubber Pads with Nuts kit (4 pcs)
7281293	Carriage Bolt Set with Nuts & Lock Washers (240 pcs)
7303898	Carriage Bolt Set with Nuts & Lock Washers (8 pcs)
7281294	Link Replacement Set (112 pcs)
7303899	Link Replacement Set (4 pcs)
7325076	Replacement 9/16" Studs with Nuts for Red Spacer (8 pcs)
7325075	Replacement 9/16" Studs with Nuts for Black Spacer (6 pcs)
7325077	Replacement 5/8" Studs with Nuts for Gray/Green Spacer (8 pcs)
7325078	Universal C-Clamp (2 pcs)
7325079	Threaded V-Hook Rod 1/2" with 2 Nuts
7281303	Installation Kit*



THE KIT INCLUDES:

- Track tightener tool
- Extra nuts and bolts
- Allen wrench
- 1/2" ratchet with required sockets

*Installation kit 7281303 is included with all tracks.


BOBCAT GENUINE UNDERCARRIAGE PARTS

Take advantage of factory-proven durability with an exceptional quality ride.
Ensure perfect design compatibility between rubber tracks, idlers, rollers
and sprockets by using genuine Bobcat undercarriage parts.



BOBCAT GENUINE UNDERCARRIAGE PARTS

Bobcat genuine undercarriage parts are designed specifically for Bobcat machines according to our OEM specifications. Take advantage of factory-proven durability with an exceptional quality ride. Ensure perfect design compatibility between rubber tracks, idlers, rollers and sprockets by using genuine Bobcat undercarriage parts.

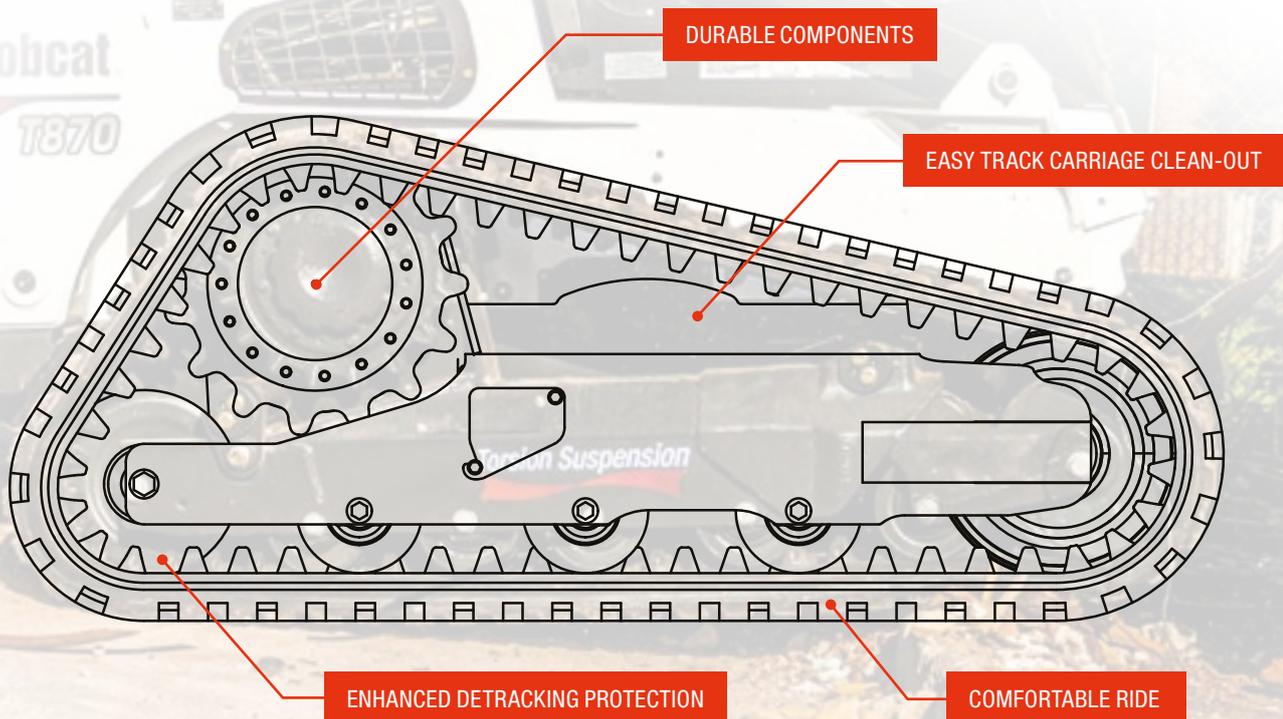

► DURABLE COMPONENTS

Tough forged steel rollers and idlers provide a smooth ride without using weak plastics or rubber, meaning the machine is less prone to downtime and will require less maintenance.

Sprockets are manufactured with forged steel with a hardness rating of HT-5, the highest rating of all standards at Bobcat for hardness, tensile, impact, casting and surface.

► EASY TRACK CARRIAGE CLEAN-OUT

A horizontally mounted tension cylinder creates more room between the undercarriage and track for easier clean-out. The undercarriage is sloped on both sides of the tracks to easily shed material such as sand, dirt, mud and debris throughout the day. Raised cutouts between the rollers also make cleaning easier.

► COMFORTABLE RIDE

Front idlers that ride on the rubber track's roller way, along with wider rollers, help reduce vibration to improve operator comfort and decrease track wear to help extend the track's life. The optional Torsion Suspension system incorporates dual-flange front idlers and wider rollers for smooth action, combining the comfort of roller suspension and the stability of a solid-mount undercarriage.

► ENHANCED DETRACKING PROTECTION

Consistent track tension associated with single-flange rear idlers help minimize the chance of loosening and detracking in tough working conditions.



E-LEARNING FOR
UNDERCARRIAGE
PARTS

- ▶ **GREAT WEAR RESISTANCE AND DURABILITY**
- ▶ **CONSISTENT PRODUCT QUALITY AND RELIABILITY**
- ▶ **EXCELLENT SURFACE AND CORE HARDNESS ENSURES LONGER WEAR LIFE, LOWERING COST PER HOUR**


BOBCAT GENUINE UNDERCARRIAGE PARTS FOR COMPACT EXCAVATORS (MX)

MODEL(S) WITH RUBBER TRACKS	S/N IDENTIFIER	IDLER ASSY PART NO.	QTY	ROLLER PART NO.	QTY	SPROCKET PART NO.	QTY
E08, E10e, E10z		7187172	2	7165324	6	7134493	2
E14		7101821	2	7101818	6	7161067	2
E16	AHLL11001 – AHLL11615	6815109	2	7136983	6	7148525	2
	AHLL11616 & above	7136982	2	7136983	6	7148525	2
E17, E17z, E19, E20, E20z		7218754	2	7136983	6	7148525	2
325, 328		7199074	2	7013575	6	6813372SUB	2
E25	AB8B11001 – AB8B12293	7205956	2	7013575	6	7199006	2
	AB8B12294 & above	7257871	2	7013575	6	7199006	2
425, 428		7199074	2	7013575	8	6813372SUB	2

MODEL(S) WITH RUBBER TRACKS	S/N IDENTIFIER	IDLER ASSY PART NO.	QTY	UPPER ROLLER PART NO.	QTY	LOWER ROLLER PART NO.	QTY	SPROCKET PART NO.	QTY
E26	All, except the S/N below	7257871	2	7257873	2	7257870	6	7199006	2
	ACRA11001 – ACRA14921, B33211001 – B33213344	7205956	2	7153331	2	7013575	6	7199006	2
E27, E27z		7257871	2	7257873	2	7257870	6	7199006	2
E32, E34		7199074	2	6692966	2	7013575	8	7199006	2
E35	B3GR11001 & above, B3K811001 & above	7199074	2	6692966	2	7013575	8	7199006	2
	AC2P11001 & above	7199074	2	7020867	2	7013575	8	7199006	2
E35z		7199074	2	7020867	2	7013575	8	7199006	2
E37		7199074	2	6692966	2	7013575	8	7199006	2
E50z		7199074	2	6692966	2	7013575	10	7199007	2
E45, E50, E55		7202053	2	6692966	2	7279612	10	7199008	2
E55z		7202053	2	6692966	2	7314059	10	7199008	2
E60	AET811001 – AET811347	7021775	2	7004843	2	7005651	10	7276068	2
	AET811348 & above	7021775	2	7004843	2	7022649	10	7276068	2
E62		7021775	2	7004843	2	7022649	10	7276068	2
E80, E85		7024105	2	7012275	2	7004933	10	7281055	2
E88		7352921	2	7303487	2	7352919	10	7354113	2



BOBCAT GENUINE UNDERCARRIAGE PARTS FOR COMPACT TRACK LOADERS (CTLs)

MODEL(S) WITH RUBBER TRACKS	OTHER IDENTIFIER	S/N IDENTIFIER	FRONT IDLER PART NO.	QTY	REAR IDLER PART NO.	QTY	ROLLER PART NO.	QTY	SPROCKET PART NO.	QTY
T110			6687137	4			6687138	8	7111447	2
T140			6693237	2	6693238	2	6689371	6	7165111	2
T190	Roller suspension	A3LN11001 – A3LN36499, A3LP11001 – A3LP36499	6693237	2	6697933	2	6693239	6	7165111	2
	Solid mounted undercarriage	A3LN11001 – A3LN36499, A3LP11001 – A3LP36499	6693237	2	6693238	2	6689371	8	7165111	2
	Solid mounted undercarriage	A3LN36500 & above, A3LP36500 & above	6693237	2	6693238	2	6689371	8	7166679	2
T250	Roller suspension		6693237	2	6697933	2	6693239	8	7165109	2
	Solid mounted undercarriage		6693237	2	6693238	2	6689371	10	7165109	2
T300	Roller suspension		6693237	2	6697933	2	6693239	8	7165109	2
	Solid mounted undercarriage		6693237	2	6693238	2	6689371	10	7165109	2
T320	Roller suspension		6693237	2	6697933	2	6693239	8	7165109	2
	Solid mounted undercarriage		6693237	2	6693238	2	6689371	10	7165109	2
T450	Solid mounted undercarriage	AUVP11001 & above, B1EM11001 & above	7211124	2	7223710	2	7201400	8	7204050	2
	Solid mounted undercarriage	B4J611001 & above	7211124	2	7223710	2	7201400	6	7204050	2
T590	Roller suspension	A3NR11001 – A3NR15598	6693237	2	6697933	2	6693239	6	7166679	2
	Roller suspension	A3NR15599 & A3NR17166	7229101	2	7233630	2	7233399	6	7166679	2
	Roller suspension	A3NR17167 & above	7229101	2	7233630	2	7233399	6	7204050	2
	Roller suspension	A3NS11001 – A3NS11999	6693237	2	6697933	2	6693239	6	7166679	2
	Roller suspension	A3NS12001 – A3NS12025	7229101	2	7233630	2	7233399	6	7166679	2
	Roller suspension	A3NS12026 & above	7229101	2	7233630	2	7233399	6	7204050	2
	Roller suspension	B37811001 – B37811103	6693237	2	6697933	2	6693239	6	7166679	2
	Roller suspension	B37811104 – B37812058	7229101	2	7233630	2	7233399	6	7166679	2
	Roller suspension	B37812059 & above, B3Z711001 & above, B3ZA11001 & above	7229101	2	7233630	2	7233399	6	7204050	2
	Solid mounted undercarriage	A3NR11001 – A3NR15598	6693237	2	6693238	2	6689371	8	7166679	2
	Solid mounted undercarriage	A3NR15599 & A3NR17166	7229101	2	7233630	2	7233399	8	7166679	2
	Solid mounted undercarriage	A3NR17167 & above	7229101	2	7233630	2	7233399	8	7204050	2
	Solid mounted undercarriage	A3NS11001 – A3NS11999	6693237	2	6693238	2	6689371	8	7166679	2
	Solid mounted undercarriage	A3NS12001 – A3NS12025	7229101	2	7233630	2	7233399	8	7166679	2
	Solid mounted undercarriage	A3NS12026 & above	7229101	2	7233630	2	7233399	8	7204050	2
	Solid mounted undercarriage	B37811001 – B37811103	6693237	2	6693238	2	6689371	8	7166679	2
	Solid mounted undercarriage	B37811104 – B37812058	7229101	2	7233630	2	7233399	8	7166679	2
	Solid mounted undercarriage	B37812059 & above, B3Z711001 & above, B3ZA11001 & above	7229101	2	7233630	2	7233399	8	7204050	2
Solid mounted undercarriage	B4KV11001 & above	7229101	2	7233630	2	7228629	8	7204050	2	

BOBCAT GENUINE UNDERCARRIAGE PARTS FOR COMPACT TRACK LOADERS (CTLs)

MODEL(S) WITH RUBBER TRACKS	OTHER IDENTIFIER	S/N IDENTIFIER	FRONT IDLER PART NO.	QTY	REAR IDLER PART NO.	QTY	ROLLER PART NO.	QTY	SPROCKET PART NO.	QTY
T650	Roller suspension	A3P021200 & above, A3P115100 & above, B2KZ13300 & above	7240006	2	7233630	2	7243576	8	7270159	2
	Roller suspension – single-speed motor drive	A3P011001 – A3P016160, A3P016162 – A3P019999, A3P111001 – A3P113999, B2KZ11001 – B2KZ11999	6693237	2	6697933	2	6693239	8	7165109	2
	Roller suspension – single-speed motor drive	A3P020001 – A3P021199, A3P114001 – A3P115099, B2KZ12001 – B2KZ13299	7240006	2	7233630	2	7243576	8	7165109	2
	Roller suspension – dual-speed motor drive	A3P011001 – A3P016160, A3P016162 – A3P019999, A3P111001 – A3P113999, B2KZ11001 – B2KZ11999	6693237	2	6697933	2	6693239	8	7196807	2
	Roller suspension – dual-speed motor drive	A3P020001 – A3P021199, A3P114001 – A3P115099, B2KZ12001 – B2KZ13299	7240006	2	7233630	2	7243576	8	7196807	2
	Solid mounted undercarriage	A3P021200 & above, A3P115100 & above, B2KZ13300 & above	7240006	2	7233630	2	7228629	8	7270159	2
	Solid mounted undercarriage – single-speed motor drive	A3P011001 – A3P016160, A3P016162 – A3P019999, A3P111001 – A3P113999, B2KZ11001 – B2KZ11999	6693237	2	6693238	2	6689371	8	7165109	2
	Solid mounted undercarriage – single-speed motor drive	A3P020001 – A3P021199, A3P114001 – A3P115099, B2KZ12001 – B2KZ13299	7240006	2	7233630	2	7228629	8	7165109	2
	Solid mounted undercarriage – dual-speed motor drive	A3P011001 – A3P016160, A3P016162 – A3P019999, A3P111001 – A3P113999, B2KZ11001 – B2KZ11999	6693237	2	6693238	2	6689371	8	7196807	2
	Solid mounted undercarriage – dual-speed motor drive	A3P020001 – A3P021199, A3P114001 – A3P115099, B2KZ12001 – B2KZ13299	7240006	2	7233630	2	7228629	8	7196807	2
T770	Roller suspension	A3P816220 & above, A3P913125 & above, B3BW12570 & above	7240006	2	7233630	2	7243576	10	7227421	2
	Roller suspension – single-speed motor drive	A3P811001 – A3P815999, A3P911001 – A3P912999, B3BW11001 – B3BW11999	6693237	2	6697933	2	6693239	8	7165109	2
	Roller suspension – single-speed motor drive	A3P816001 – A3P816219, A3P913001 – A3P913124, B3BW12001 – B3BW12569	7240006	2	7233630	2	7243576	10	7165109	2
	Roller suspension – dual-speed motor drive	A3P811001 – A3P813485, A3P911001 – A3P912191	6693237	2	6697933	2	6693239	8	7196807	2
	Roller suspension – dual-speed motor drive	A3P813486 – A3P815999, A3P912192 – A3P912999	7240006	2	6697933	2	6693239	8	7196807	2
	Roller suspension – dual-speed motor drive	A3P816001 – A3P816219, A3P913001 – A3P913124, B3BW12001 – B3BW12569	7240006	2	7233630	2	7243576	10	7196807	2
	Roller suspension – dual-speed motor drive	B3BW11001 – B3BW11999	6693237	2	6697933	2	6693239	8	7196807	2
	Solid mounted undercarriage	A3P816220 & above, A3P913125 & above, B3BW12570 & above	7240006	2	7233630	2	7228629	10	7227421	2
	Solid mounted undercarriage – single-speed motor drive	A3P811001 – A3P815999, A3P911001 – A3P912999, B3BW11001 – B3BW11999	6693237	2	6693238	2	6689371	8	7165109	2

BOBCAT GENUINE UNDERCARRIAGE PARTS FOR COMPACT TRACK LOADERS (CTLs)

MODEL(S) WITH RUBBER TRACKS	OTHER IDENTIFIER	S/N IDENTIFIER	FRONT IDLER PART NO.	QTY	REAR IDLER PART NO.	QTY	ROLLER PART NO.	QTY	SPROCKET PART NO.	QTY
T770	Solid mounted undercarriage – single-speed motor drive	A3P816001 – A3P816219, A3P913001 – A3P913124, B3BW12001 – B3BW12569	7240006	2	7233630	2	7228629	10	7165109	2
	Solid mounted undercarriage – dual-speed motor drive	A3P811001 – A3P813485, A3P911001 – A3P912191	6693237	2	6693238	2	6689371	8	7196807	2
	Solid mounted undercarriage – dual-speed motor drive	A3P813486 – A3P815999, A3P912192 – A3P912999	7240006	2	6693238	2	6689371	8	7196807	2
	Solid mounted undercarriage – dual-speed motor drive	A3P816001 – A3P816219, A3P913001 – A3P913124, B3BW12001 – B3BW12569	7240006	2	7233630	2	7228629	10	7196807	2
	Solid mounted undercarriage – dual-speed motor drive	B3BW11001 – B3BW11999	6693237	2	6693238	2	6689371	8	7196807	2
T870	Chain Case & Torsion Axles		7355129	2	7359425	2	7323310	10	7227421	2
	Roller suspension – single-speed motor drive		6698048	2	6698049	2	6698047	8	7165109	2
	Roller suspension – dual-speed motor drive		6698048	2	6698049	2	6698047	8	7196807	2
T66	Solid mounted undercarriage / Torsion suspension		7229101	2	7233630	2	7228629	8	7316550	2
T76	Solid mounted undercarriage / Torsion suspension		7240006	2	7233630	2	7352427	8	7316550	2
T86	Solid mounted undercarriage / Torsion suspension – dual-speed motor drive – single-flange rear idler		7240006	2	7359425	2	7352427	10	7418229	2
T86	Solid mounted undercarriage / Torsion suspension – dual-speed motor drive – triple-flange rear idler		7240006	2	7349269	2	7352427	10	7418229	2



[DOWNLOAD
 UNDER-
 CARRIAGE
 REFERENCE GUIDE](#)

